


Figure-8 Unitube



Features

- Max. core: 24
- Water blocking, superior mechanical and environmental performance
- Supporting various accessories
- Easy strip, easy maintenance

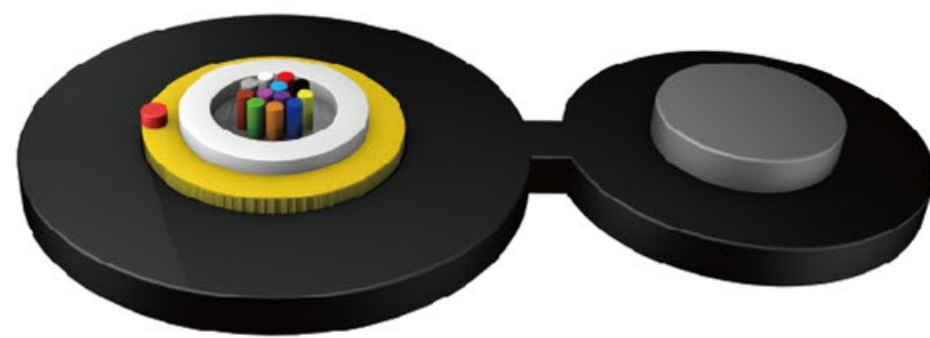

Applications

- Aerial installation
- Indoor access



Installation performance

- Min. bend radius: installation 30W, operation 15W
- Temperature range: storage -40~+70°C, installation -10~+50°C, operation -20°C~+70°C



Easy Strip



Water Blocking



Aerial



Last-mile Connection

• Products can be customized, included but not limited to the above