


Mini Simplex Unit Distribution Cable



Features

- Small volume, light weight
- Flame-resistant, low smoke, non-toxic
- Easy install, easy mid-span access, sub-unit separate independent
- Flexible, easy coiled in the floor distribution box

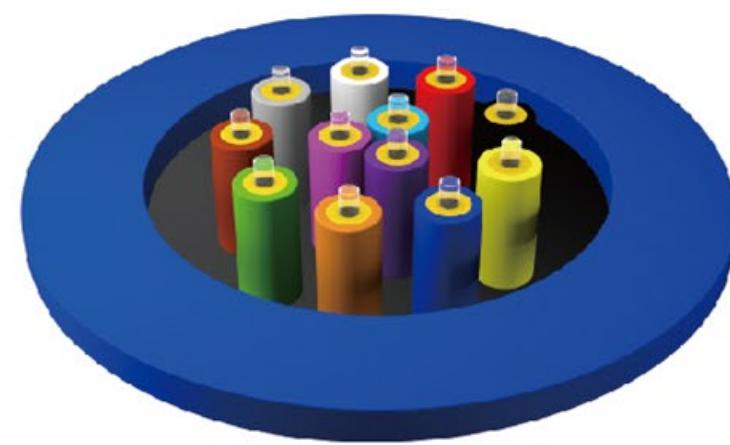

Applications

- Indoor installation



Installation performance

- Min. bend radius: installation 20D, operation 10D
- Temperature range: storage -20~+60°C, installation -5~+40°C, operation -10°C~+60°C



Flexible



Easy Strip



Eco-friendly



Flame Retardant



Pre-connect



Indoor

• Products can be customized, included but not limited to the above