Figure-8 Round Type Cable






Features

- Light weight, stable structure
- Superior bending feature and mechanical performance
- Flame retardant, low smoke, non-toxic
- Field patch cord compatibility



Applications

- Aerial installation
- Indoor access

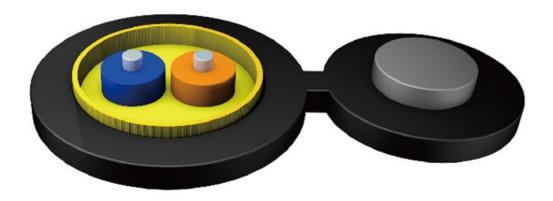



Installation performance

- Min. bend radius: installation 30W, operation 15W
- Temperature range: storage -20~+70°C, installation
 -10~+50°C, operation -10°C~+70°C











